PROTECTION RELAY

DOR SERIES

DIGITAL OVERLOAD RELAY


VTEKE®

TECHNICAL DATA

PARAMETER	VALUE
Operating Voltage	150-260V AC
Operating Frequency	50 / 60 Hz
Operating Power	<6VA
Operating Temperature	-20°C.....55°C
Weight	<250Gr
High Current (overload) rang	DOR-25: 0.1A-25A AC DOR-50: 15A-50A AC DOR-100: 40A-100A AC DOR-200: 90A-200A AC DOR-400: 290A-400A AC
Asymmetry	%50 fixed
Waiting (t)	0.1sec – 20sec
Display	5 LEDS + 3 Displays
Contact	1NO+1NC; 5A/250VAC
Protection Class	IP20
Connection Type	Terminal Connection
Cable Diameter	Max2.5mm²
Mounting	DIN Rail Mounting
Working Altitude	<2000 meter



DIMENSIONS

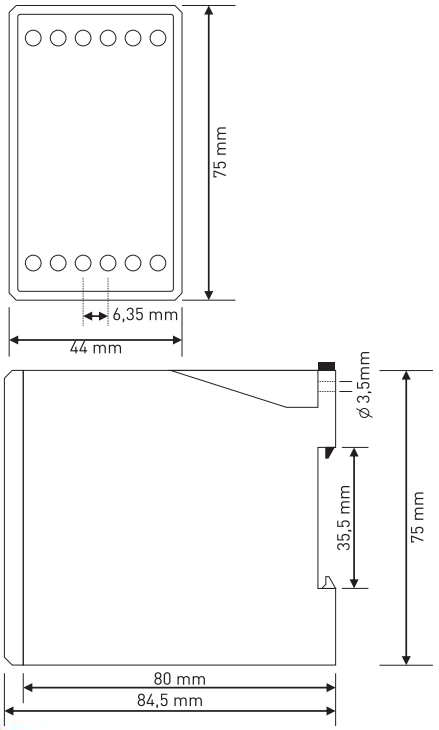

DIAGRAM

