

PTR SERIES (DIGITAL ON & OFF DELAY TIMER WITH TRIGGER)

PTR SERIES

VTEKE®

www.vteke.com.tr

FEATURES


PTR-XX triggered ON Delay and OFF Delay digital timer is designed to be used wherever time dependent control is required.

TECHNICAL DATA

Operating Voltage (A1-A2)	160-240V AC 50/60Hz
Operating Voltage (A2-A3)	24V AC/DC (A2 (-), A3 (+))
Trigger Voltage (TRG)	24V-240V
Operating Power	<6VA
Operating Temperature	-20°C +55°C
Operating Time Range	0.1 sec. - 999 min
Display	1x3 LED Display, 2x LEDs
Connection Type	Mounting on the front panel cover
Weight	<250gr
Contact	5A 250V AC Resistive Load
Operating Altitude	<2000m
Cable Diameter	2.5mm ²



DIMENSIONS

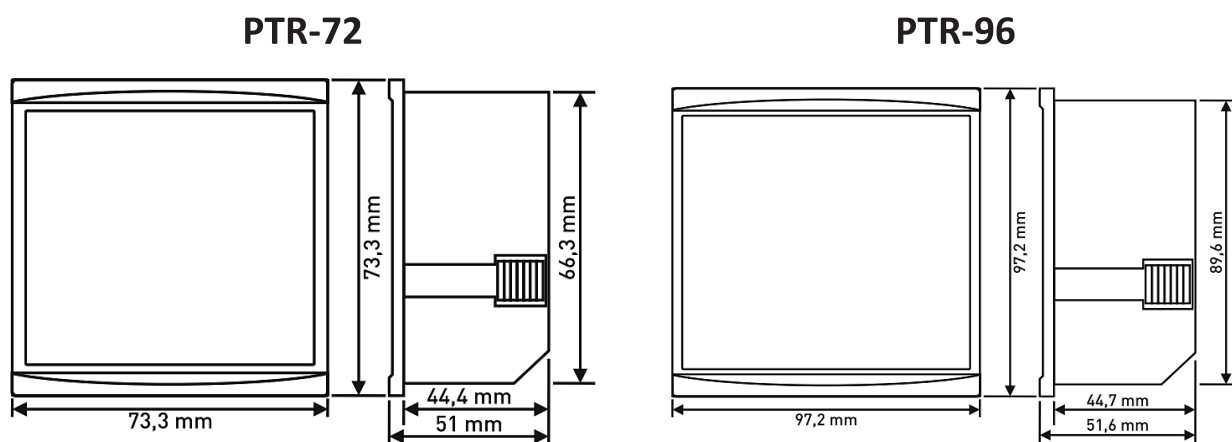

CONNECTION DIAGRAM

